

SPIKE COUPLER

ROW CROPS

NURSERIES

ORCHARDS

Spike riser locks male and female coupler halves and stabilizes the riser in a vertical position.


Substantial savings over aluminum or buried solid set systems.

IMPROVED WEATHERABILITY

PVC COMPOUNDS

- HIGHEST UV INHIBITORS
- HIGHEST IMPACT RESISTANCE

**EASY OFF SEASON STORAGE...
SIMPLY REMOVE SPIKE RISER**

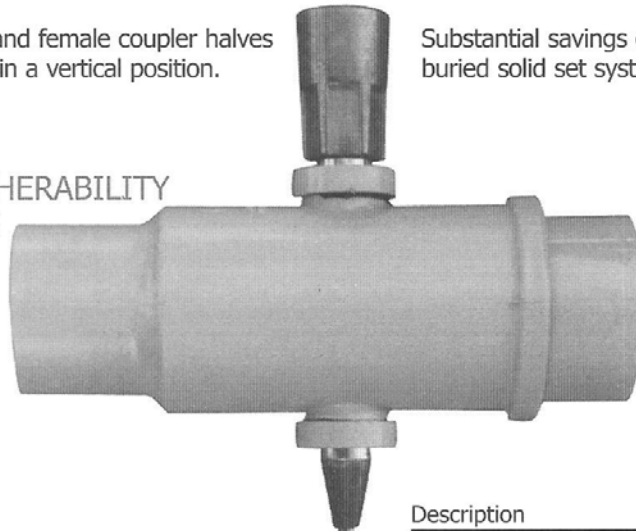


3/4" Female IPT Thread



Aluminum Tubing Spike Riser (non-corrosive)

Quad Seal prevents water leakage around Spike

Slotted male end allows for up to 1-1/4" expansion and contraction of PVC pipe.

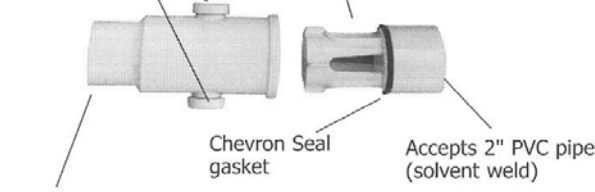

Chevron Seal gasket

Accepts 2" PVC pipe (solvent weld)

Accepts 2" PVC pipe bell (solvent weld)

Can be adapted to 2-1/2" PVC

Description	Size	List
Spike Coupler, complete*	2"	13.40
Spike Coupler, complete*	2-1/2"	16.88
Parts		
Female molding w/ quad seal & caps	2"	7.10
Female molding w/ quad seal & caps	2-1/2"	8.58
Male molding w/ chevron seal gasket	2"	4.33
Chevron Seal gasket	2"	1.77
Quad Seal (2 required)		0.92
Cap for Quad Seal (2 required)		0.48
Spike Riser with 3/4" IPT outlet		5.25
Aluminum tube for mainline coupler w/ cotter keys		1.77
Adapter for male end	2-1/2"	3.21

Parts

* (includes Spike Riser with 3/4" IPT outlet)

Additional Parts & Assemblies Available

Description	Price
2" x 30' PVC Pipe w/ Spike Coupler	\$32.00
Spike Tee	\$19.00
Spike 90 Elbow	\$15.00
Spike Pump Connection	\$10.00
3/4" Threaded Plug	\$.80
End Plug	\$ 5.50

INDIANA IRRIGATION Co., INC.

12 MAIN STREET PO BOX 3
ONWARD, IN 46967

PHONE (574)626-3398

FAX (574)626-2378

EMAIL INIR@JUNO.COM

Effective January 1, 2005